

## J18 Series\J18 Low Frequency Series\J18 Floating Wrap Mounting Series

### Product Character Introduction

- ◆ Wrapping connecting terminal and wire,
- ◆ Float mounting,
- ◆ Three alternative contact terminal length (measured by pin length exceed base):

1. F179 - 9.6mm. Capable wrap two wires.
2. F179A - 12.7mm. Capable wrap three wires.
3. F179B - 6.4mm. Capable wrap one wire.

#### ◆ Connector:

1. Pin socket,
2. Receptacle socket.

### Product Outline Size

#### Plug


◆ J18ER-9PF179、J18AR-15PF179、  
J18BR-25PF179、J18CR-37PF179

◆ J18ER-9PF179A、J18AR-15PF179A、  
J18BR-25PF179A、J18CR-37PF179A


◆ J18ER-9PF179B、J18AR-15PF179B、  
J18BR-25PF179B、J18CR-37PF179B

◆ J18DR-50PF179、J18DR-50PF179A、  
J18DR-50PF179B

#### Product 3D Diagram




J18BR-25PF179

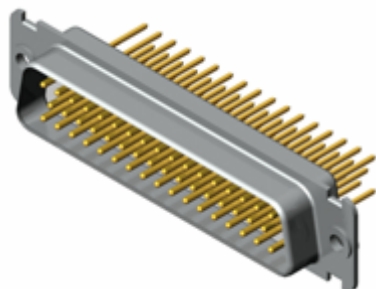

J18DR-50PF179


#### Product Outline Size

J18 × R- × PF179 ( × ) outline size

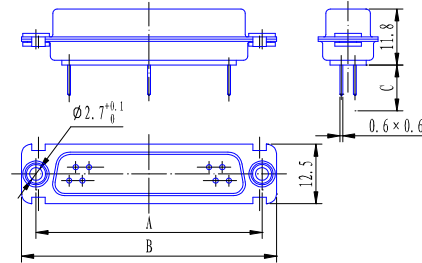

| Order Mark     | A    | B    | C    |
|----------------|------|------|------|
| J18ER-9PF179   | 25   | 31   | 9.6  |
| J18AR-15PF179  | 33.3 | 39.3 | 9.6  |
| J18BR-25PF179  | 47   | 53.2 | 9.6  |
| J18CR-37PF179  | 63.5 | 69.5 | 9.6  |
| J18ER-9PF179A  | 25   | 31   | 12.7 |
| J18AR-15PF179A | 33.3 | 39.3 | 12.7 |
| J18BR-25PF179A | 47   | 53.2 | 12.7 |
| J18CR-37PF179A | 63.5 | 69.5 | 12.7 |
| J18ER-9PF179B  | 25   | 31   | 6.4  |
| J18AR-15PF179B | 33.3 | 39.3 | 6.4  |
| J18BR-25PF179B | 47   | 53.2 | 6.4  |
| J18CR-37PF179B | 63.5 | 69.5 | 6.4  |

J18DR-50PF179 ( × ) outline size

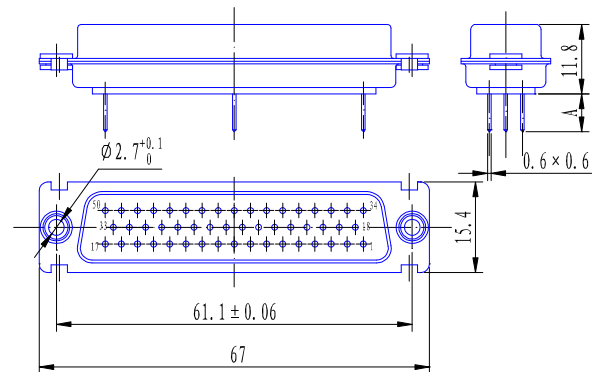

| Order Mark     | A    |
|----------------|------|
| J18DR-50PF179  | 9.6  |
| J18DR-50PF179A | 12.7 |
| J18DR-50PF179B | 6.4  |

### Mounting Hole Size

See Section “J18 Series Mounting Hole Size”.

**J18 Series\J18 Low Frequency Series\J18 Floating Wrap Mounting Series**

**Receptacle**


◆ J18ER-9SF179、J18AR-15SF179、  
J18BR-25SF179、J18CR-37SF179

◆ J18ER-9SF179A、J18AR-15SF179A、  
J18BR-25SF179A、J18CR-37SF179A


◆ J18ER-9SF179B、J18AR-15SF179B、  
J18BR-25SF179B、J18CR-37SF179B

◆ J18DR-50SF179、J18DR-50SF179A、  
J18DR-50SF179B

**Product 3D Diagram**




J18BR-25SF179

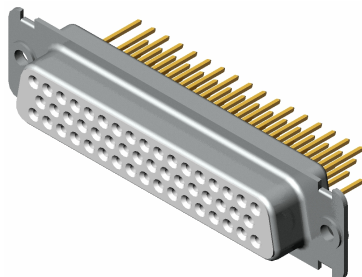

J18DR-50SF179

**Product Outline Size**


▼ J18R × - × SF179 (×) outline size

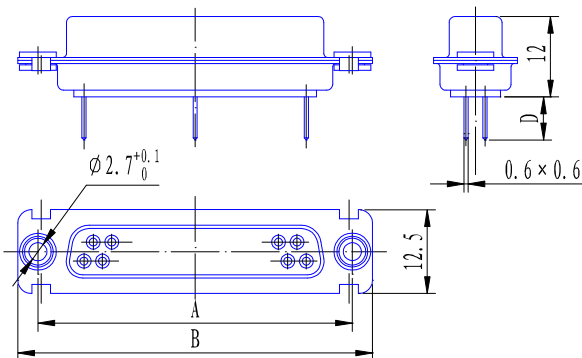

| Order Mark    | A    | B    | C   |
|---------------|------|------|-----|
| J18ER-9SF179  | 25   | 31   | 9.6 |
| J18AR-15SF179 | 33.3 | 39.3 | 9.6 |

|                |      |      |      |
|----------------|------|------|------|
| J18BR-25SF179  | 47   | 53.2 | 9.6  |
| J18CR-37SF179  | 63.5 | 69.5 | 9.6  |
| J18ER-9SF179A  | 25   | 31   | 12.7 |
| J18AR-15SF179A | 33.3 | 39.3 | 12.7 |
| J18BR-25SF179A | 47   | 53.2 | 12.7 |
| J18CR-37SF179A | 63.5 | 69.5 | 12.7 |
| J18ER-9SF179B  | 25   | 31   | 6.4  |
| J18AR-15SF179B | 33.3 | 39.3 | 6.4  |
| J18BR-25SF179B | 47   | 53.2 | 6.4  |
| J18CR-37SF179B | 63.5 | 69.5 | 6.4  |

J18DR-50SF179 (×) outline size

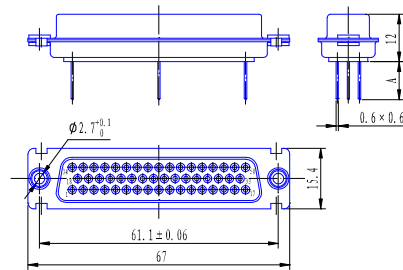

| Order Mark     | A    |
|----------------|------|
| J18DR-50SF179  | 9.6  |
| J18DR-50SF179A | 12.7 |
| J18DR-50SF179B | 6.4  |

**Mounting Hole Size**

See Section “J18 Series Mounting Hole Size”.