

J18 Series\J18 Low Frequency Series\J18 Fix Wrap Mounting Series

Product Character Introduction

- ◆ Wrapping connecting terminal and wire,
- ◆ Fix mounting,
- ◆ Three alternative contact terminal length (measured by pin length exceed base):

by pin length exceed base):

1. F179 - 9.6mm. Capable wrap two wires.
2. F179A - 12.7mm. Capable wrap three wires.
3. F179B - 6.4mm. Capable wrap one wire.

- ◆ Connector:

1. Pin socket,
2. Receptacle socket.

Product Outline Size

Plug


◆ J18E-9PF179、J18A-15PF179、J18B-25PF179、J18C-37PF179

◆ J18E-9PF179A、J18A-15PF179A、J18B-25PF179A、J18C-37PF179A


◆ J18E-9PF179B、J18A-15PF179B、J18B-25PF179B、J18C-37PF179B

◆ J18D-50PF179、J18D-50PF179A、J18D-50PF179B、

Product 3D Diagram




J18B-25PF179

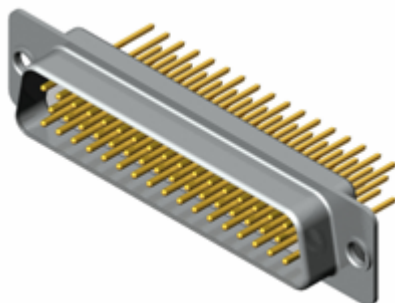

J18D-50PF179


Product Outline Size

J18 × - × PF179 (×) outline size

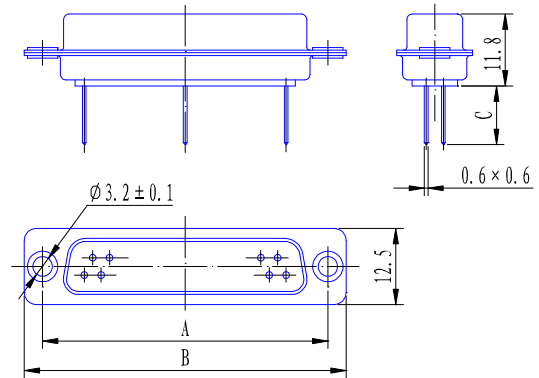

Order Mark	A	B	C
J18E-9PF179	25	31	9.6
J18A-15PF179	33.3	39.3	9.6
J18B-25PF179	47	53.2	9.6
J18C-37PF179	63.5	69.5	9.6
J18E-9PF179A	25	31	12.7
J18A-15PF179A	33.3	39.3	12.7
J18B-25PF179A	47	53.2	12.7
J18C-37PF179A	63.5	69.5	12.7
J18E-9PF179B	25	31	6.4
J18A-15PF179B	33.3	39.3	6.4
J18B-25PF179B	47	53.2	6.4
J18C-37PF179B	63.5	69.5	6.4

J18D-50PF179 (×) outline size

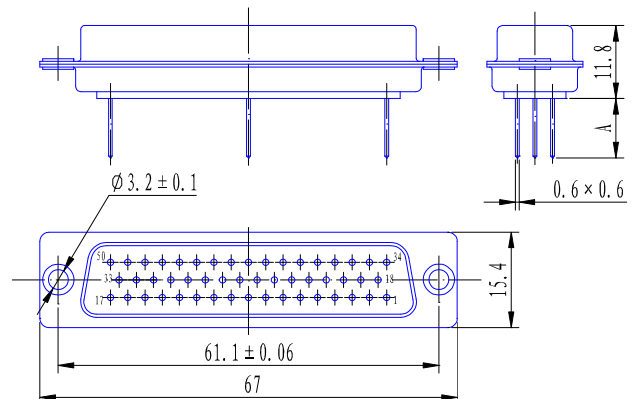

Order Mark	A
J18D-50PF179	9.6
J18D-50PF179A	12.7
J18D-50PF179B	6.4

Mounting Hole Size

See Section “J18 Series Mounting Hole Size”.

J18 Series\J18 Low Frequency Series\J18 Fix Wrap Mounting Series

Receptacle


◆ J18E-9SF179、J18A-15SF179、J18B-25SF179、J18C-37SF179

◆ J18E-9SF179A、J18A-15SF179A、J18B-25SF179A、J18C-37SF179A


◆ J18E-9SF179B、J18A-15SF179B、J18B-25SF179B、J18C-37SF179B

◆ J18D-50SF179、J18D-50SF179A、J18D-50SF179B

Product 3D Diagram




J18B-25SF179

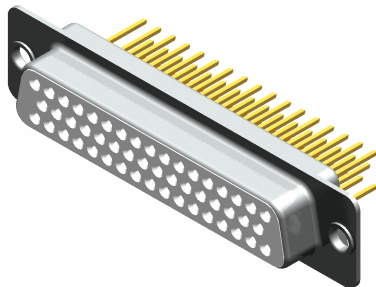

J18D-50SF179


Product Outline Size

J18 × - × SF179 (×) outline size

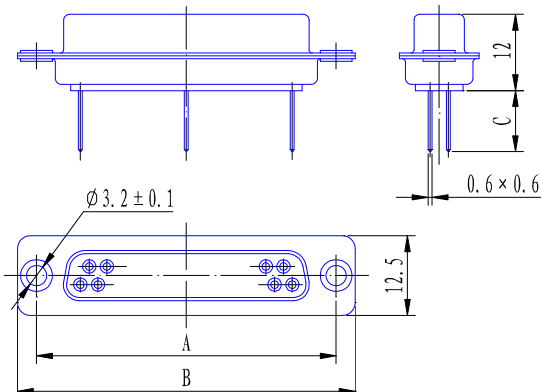

Order Mark	A	B	D
J18E-9SF179	25	31	9.6
J18A-15SF179	33.3	39.3	9.6
J18B-25SF179	47	53.2	9.6
J18C-37SF179	63.5	69.5	9.6
J18E-9SF179A	25	31	12.7
J18A-15SF179A	33.3	39.3	12.7
J18B-25SF179A	47	53.2	12.7
J18C-37SF179A	63.5	69.5	12.7
J18E-9SF179B	25	31	6.4
J18A-15SF179B	33.3	39.3	6.4
J18B-25SF179B	47	53.2	6.4
J18C-37SF179B	63.5	69.5	6.4

J18D-50SF179 (×) outline size

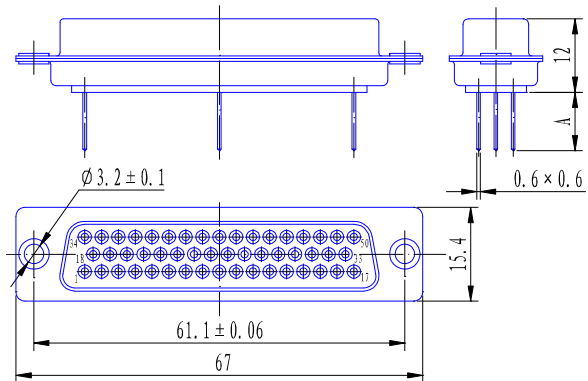

Order Mark	A
J18D-50SF179	9.6
J18D-50SF179A	12.7
J18D-50SF179B	6.4

■ Mounting Hole Size

See Section “J18 Series Mounting Hole Size”.