


946 Series Relay

FEATURES

- UL safety approval.
- Standard type & High sensitivity type available.
- 2 Amps super miniature relay.
- Conforms to FCC rules & regulation part 68.
- Surge strength: 1500 VAC.
- 1 Form C (SPDT) contact.
- Nominal power 200mW~360mW.
- Operating power 110mW~200mW.
- DIL pitch terminal.
- Washable Type (ultrasonic cleaning is not recommended).



UL FILE NO: E162117

CONTACT RATINGS


- Contact Arrangement.....1 Form C (SPDT)
- Max. Switching Power.....125VA 60W
- Max. Switching Voltage.....125VAC 30VDC
- Max. Switching Current.....2A
- Contact Resistance..... $\leq 100\text{m}\Omega$
- Rating Load.....1A/125VAC
.....2A/30VDC
- Contact MaterialAg Alloy

CHARACTERISTICS

- Electrical Life..... 1×10^5
- Mechanical Life..... 1×10^7
- Initial Insulation Resistance.....Min. 100M Ω 500VDC
- Contact Resistance (Initial)..... $\leq 100\text{m}\Omega$
- Operate Time..... $\leq 6\text{ms}$
- Release Time..... $\leq 3\text{ms}$
- Initial Dielectric Strength
.....50/60Hz 500VAC 1 min. (between open contacts)
.....50/60Hz 500VAC 1 min. (between contacts and coil)
- Vibration Resistance
.....Malfunction: 10 to 55Hz at Double Amplitude of 1.5mm
.....Destructive: 10 to 55Hz at Double Amplitude of 1.5mm
- Shock Resistance
.....Malfunction: 10G (11ms) / Destructive: 100G (6ms)
- Ambient Temperature..... $-20^\circ\text{C} \sim +40^\circ\text{C}$
- Relative Humidity.....85% at 40°C
- Unit Weight.....Approx. 3g


946 Referential Data

Timing

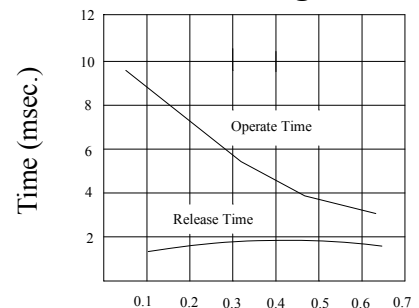


Coil Power (W)

Coil Temperature Rise

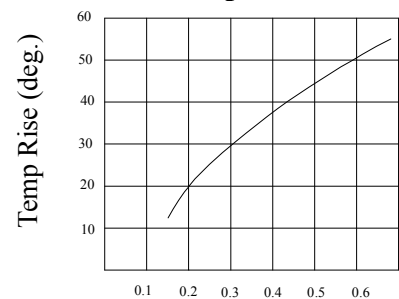

Coil Power (W)

Life Curves

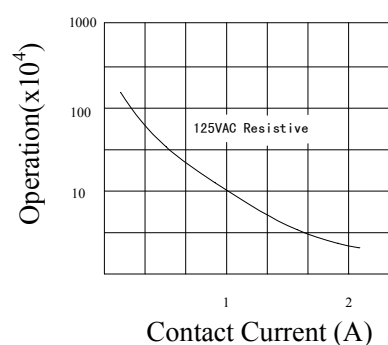

Contact Current (A)

ORDERING INFORMATION

Beijing AC Vision Electronic Co., Ltd.

www.acvisioncn.com


<u>946</u>	<u>H</u>	-	<u>1C</u>	-	<u>12</u>	<u>D</u>	-	<u>F</u>
1	2		3		4	5		6
Terminal arrangement.....Nil = General TypeF = Movable contact terminal & Coil terminal at one Side								
Coil Type.....D: DC								
Coil Voltage.....3~24V								
Contact Arrangement.....1C = 1 Form C (SPDT)								
Coil Sensitivity.....Nil = Standard TypeH = High Sensitive Type								
Model Number.....946								

COIL RATINGS (at 20℃)

COIL TYPE	Coil Nominal Voltage (V)	Coil Resistance (Ω ± 10%)	Pick-Up Voltage (V) ≤	Drop-Out Voltage (V) ≥	Nominal Current (mA)
Standard Coils	3	25	2.25	0.3	120
	5	70	3.75	0.5	71.4
	6	100	4.5	0.6	60
	9	220	6.75	0.9	40.9
	12	400	9	1.2	30
	24	1600	18	2.4	15
High Sensitive Coils	3	45	2.25	0.3	66.7
	5	125	3.75	0.5	40
	6	180	4.5	0.6	33.3
	9	405	6.75	0.9	22.2
	12	720	9	1.2	16.7
	24	2880	18	2.4	8.3

* Max Continuous Voltage at 20℃： 110% of Coil Nominal Voltage.

OUTLINE DIMENSIONS

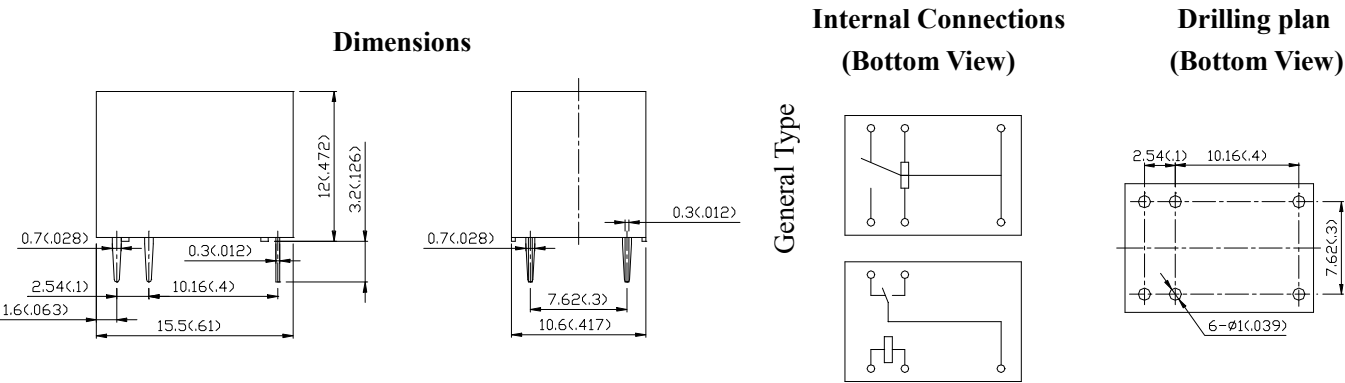

EMARK: Tolerance of outline dimensions: ±0.1(.004).
UNIT: mm(inch)