

J18 Series\J18 Mix Mounting Series\J18 Mix Floating Mounting Including Low Frequency Series

Product Character Introduction

- ◆ Low frequency contact component installed.
- ◆ Mounting structure: Floating.
- ◆ Suitable for installing with high frequency, high voltage and high power contactor components;
- ◆ low frequency contact terminal length (measured by pin length exceed base): 4.5mm;
- ◆ Connector:

1. Pin socket,
2. Receptacle socket.


Product Outline Size

Plug

E-type Shell Product

- ◆ J18ER-5W1P


Product 3D Diagram



J18ER-5W1P

Product Outline Size

J18ER-5W1P outline size

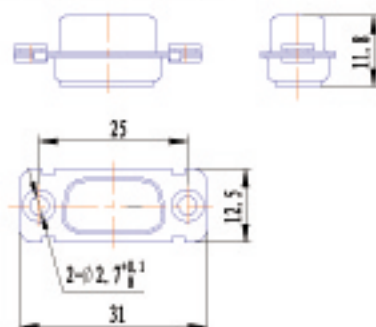

Mounting Hole Size

See Section "J18 Series Mounting Hole Size".

A-type Shell Product

- ◆ J18AR-7W2P, J18AR-11W1P


Product 3D Diagram



J18AR-7W2P

Product Outline Size

J18AR-7W2P, J18AR-11W1P outline size

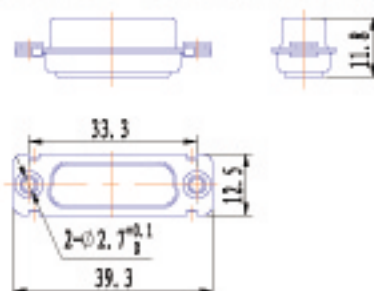


Mounting Hole Size

See Section "J18 Series Mounting Hole Size".

B-type Shell Product

- ◆ J18BR-9W4P, J18BR-13W3P, J18BR-17W2P, J18BR-21W1P


Product 3D Diagram



J18BR-17W2P

Product Outline Size

J18BR-9W4P, J18BR-13W3P, J18BR-17W2P, J18BR-21W1P outline size

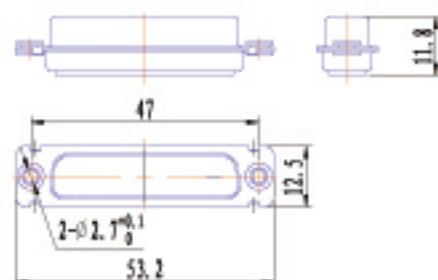

Mounting Hole Size